



Conveyor Belt Catalogue



PT. Bando Indonesia

With a rich history and tradition behind us, PT. Bando Indonesia is today the leading manufacturer of conveyor belt in Indonesia.

PT. Bando Indonesia is a joint venture manufacturing company between PT. Kreasi Utama Investama and Bando Chemical Industries, Ltd. Japan, which is one of the world's leading integrated manufacturers of belts since 1906.

Since our establishment in 1987 in Indonesia, we have continually innovated and developed our products to earn our customer's satisfaction.



Production Facility

With a 5 hectares production facility in Tangerang, some 40 km from Jakarta, we continued expanding our conveyor belt production.

We now have established ourselves as the leading pioneer in producing quality conveyor belt in Indonesia. Our conveyor belts are widely used in the mining, fertilizer, cement, pulp and paper as well as many other industries throughout the country.

Quality Control

To maintain our high standard of “zero defect” quality control, we are committed to exceed the quality requirements of our customers.

We only use top grade materials, exacting manufacturing standards and constant quality measurements. Each step of the manufacturing procedure receives rigorous quality testing. Finished products must pass final comprehensive inspection before shipment.

With our state of the art laboratory and testing equipment, our research personnel ensure that every product leaving our factory is delivered to your standard and expectations. For these, we have received certifications as a belt manufacturer.



World Class Satisfaction

In addition to producing top quality and reliable products, we also provide technical support to assist our customers in optimizing their belts reliability and performance.

Today, you can find our products in many of the industry's most demanding belt applications because we take pride in manufacturing “world class products” for our customers.

We understand that in order for you to deliver the consistent, and outstanding performance that your customers expect, you must receive the same level of service from us. Thus, we guarantee your satisfaction.



Belt Construction & Selection of Fabric

Belt Construction

Suncon (Multi-Ply)	Sunlon (Less-Ply)
<p>EP Fabric</p> <p>Top Cover Rubber</p> <p>Topping Rubber</p> <p>Molded Edge</p> <p>Bottom Cover Rubber</p>	<p>EP Fabric</p> <p>Top Cover Rubber</p> <p>Bottom Cover Rubber</p> <p>Cushion Rubber</p> <p>Molded Edge</p> <p>Features :</p> <ul style="list-style-type: none"> • Superior Fastener Holding Ability • High Impact Resistance • Small Pulley Diameter • High Bending Resistance • Complete Moisture & Mildew Protection • Deep Trough

Selection of Fabric by Service Conditions

Fabric	Features and Service Conditions
<p>NN Nylon-Nylon</p>	<ul style="list-style-type: none"> • High Impact Resistance • High Bending Resistance
<p>EP Polyester-Nylon</p>	<ul style="list-style-type: none"> • Short Take-up Travel • Heavy Duty • Deep Trough • High Tension • High Speed • Long Span • Tear Resistance • Impact Resistance • Complete Moisture & Mildew Protection

General Cover Rubber

Size Code & Product Range

General Cover Rubber

Grades And Applications	
JIS-L	for conveying low abrasive materials
JIS-G	for conveying medium abrasive materials
JIS-S	for conveying abrasive materials
Grade M	superior abrasion resistance and cut-and-gouge resistance
UIP (Ultra Impact Protection)	superior in impact resistance as well as cut-and-gouge resistance
SAR (Super Abrasive Resistant)	very high abrasion resistance
Equivalent RMA, DIN, BS, AS, etc. standards available.	

Size Code

Example 1 : Overall belt strength

900 x EP 400 / 4P x 5.0 x 1.5 x 200, Grade M							
A	B	C	D	E	F	G	H

A : Belt width (mm)

B : Type of fabric (EP = Polyester-Nylon)

C : Tensile strength (kgf/cm)

D : Number of plies

E : Top cover rubber thickness (mm)

F : Bottom cover rubber thickness (mm)

G : Belt length (meter)

H : Cover rubber grade

Example 2 : One Ply strength

900 x EP 100 x 4P x 5.0 x 1.5 x 200, Grade M							
A	B	C	D	E	F	G	H

Product Range

Product Range	
Belt Width	300mm - 3000mm
Belt Length	Min. order 30 meters
Top Cover Thickness	0 - 30 mm
Bottom Cover Thickness	0 - 30 mm
Number of Ply	1 - 8 ply
Belt Strength	100 - 2,800 kgf/cm
Packing Weight	30 Tons Max.
Roll Diameter	3.4 m max.
Selection of Fabric	EP (POLYESTER-NYLON)
Selection of Cover Rubber	<ul style="list-style-type: none"> JIS-L, JIS-G, JIS-S, Grade M, UIP, SAR HC-513, HC-710 OR-210, OR-220 FR-300T CR

Special Application Cover Rubbers



Heat-Carry Conveyor Belt

Applications

These conveyor belts are designed for use where either the material temperature or ambient temperature exceeds 60°C (140°F). They are suitable for the conveyance of sintered ore or pellets in steel mills; or dry material, clinker or cement products in cement mills.

Features

Types, Features and Applications of Heat-Carry Belts


Type of Belts	Main Polymer	Applications	Specifications
HC-513	SBR (Styrene Butadiene Rubber)	for low-medium temperature	This Heat-Carry belt is made of SBR material. It is superior in abrasion resistant and has better crack resistant
HC-710	EPR (Ethylene Propylene Rubber)	for high temperature	This noncrack model is made of EPR polymer and is highly resistant to thermal degradation. It is suitable for high temperature applications and is abrasion resistant.

Standard Applicable Temperature °C

Type of Belts	Temperature					Applicable Materials
	60°C (140°F)	100°C (210°F)	150°C (300°F)	180°C (356°F)	400°C (752°F)	
HC-513	<div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>					Coke, Sintered ore, Ore pellets, Dry lime.
HC-710	<div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>					Sintered ore, Ore pellets, Cement clinker, Coke, Dry clay.

: Material Temperature
 : Belt Surface Temperature

Flame-Resistant Conveyor Belt

Type of Belt	Main Polymer	Major Features and Applications
 FR-300T	SBR + BR + NR (Styrene Butadiene Rubber + Butadiene Rubber + Natural Rubber)	<ul style="list-style-type: none"> * It is self-extinguishing * Standard in accordance to JIS K-6324 burner combustion test * This belt is suitable for underground mines and power plant and other locations where the potential for fire hazards exist

Flame Reappearance Test JIS K-6324

Specimens	Testing Procedures	Specifications
Belt width : 25mm (1 inch) Belt length : 150mm (6 inch) Number of specimen : 3	Flame Holding Test The time during which the material remains aflame after combustion for one minute Residual Flame The material is exposed to a blast of air with a velocity of 1.5m/sec (5ft/sec). 30 second after the flame dies	Material should not remain aflame longer than one minute. Residual flame No flame should reappear

Oil-Resistant Conveyor Belt

Applications

This belt can convey various oil products, oil-treated materials, sewage and garbage.

Features

1. Less swelling with oil
2. Wide selection of belts designed for use with various types of oil based materials.

Type of Belts	Main Polymer	Major Features and Applications
OR-210	NBR (Nitrile Butadiene Rubber)	Resistant to oils (minerals, animal and vegetable oils) except aromatic solvents (benzol, toluol), halogenated hydrocarbon, ketone, ester. Cover rubber is highly resistant to abrasion.
OR-220	NBR + NR (Nitrile Butadiene Rubber + Natural Rubber)	Oil resistant and cold temperature resistant for transporting lighter substances. Applicable to conveyance of wood chips, frozen fish and grains.



Chemical Resistant, V-Cleat, Bucket Elevator & Rough Top Conveyor Belt

Chemical-Resistant Conveyor Belt

Type of Belt	Main Poylmer	Applications
CR	SBR (Styrene Butadiene Rubber)	Used as cover rubber for handling various kind of chemical or materials mixed with chemical contents such as phosphate base fertilizer, etc.

V-Cleat Conveyor Belt

Applications


Designed for conveying granular materials and bagged materials such as sand gravel, iron ore pellets, etc on inclines of up to 30°.

Features

This belt is produced with vulcanized cleat for better durability

Product Range

- Belt Width : 300 - 1,000 mm
- Cleat Height : 5 mm
- Cleat Width : 12 mm
- Cover rubber : All types available except HC-710
- Cleat Angle : 120°
- Cleat Pitch : 75 mm

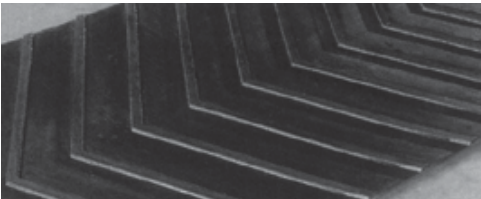


Bucket Elevator Conveyor Belt

Applications

Buckets can be attached with bolts to vertically installed belt, which is suitable for conveying bulk materials such as grains, cement materials and other fine particle products.

Product Range

- Belt Width : 300 - 2,200 mm
- Cover Rubber : All types available

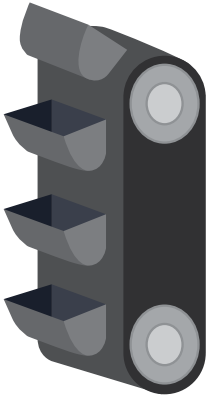

Rough Top Conveyor Belt

Applications


Belt has a loosely textured surface suitable for conveying bags and packages up to a maximum incline of 30°.

Features

Strong corrugated surface texture which absorbs impact and prevents conveyed objects from shifting or falling off the belt.

Product Range

- Belt Width : 300 - 1,200 mm
- Cover rubber : Rough top

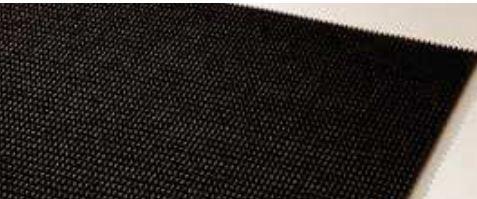

Belt Splicing Materials

Hot Splice

Applications

These materials are used for high tension belts to ensure long service life. Splice materials are manufactured to customers' order to ensure they are supplied in fresh condition.



Materials

- Cover Stock
- Edge Rubber
- Tie Gum
- Rubber Cement
- Cleaning Solvent

Applicable Range

- Belt Tension : All fabric reinforced belts
- Cover Rubber Type : All types

Bando Hot Splice Material Codes

Type of Belts	Cover Stock & Edge Rubber	Tie Gum	Rubber Cement
General Cover Rubber including Rough Top	C # 07	T # 31	J # 31
SAR	C # 01	T # 31	J # 31
UIP	C # 17	T # 31	J # 31
Heat-Carry :			
HC-513	TK # 60	TK # 53	TK # 60
HC-710	X # 345	X # 26	X # 26
Oil-Resistant :			
OR-210	N # 631	N # 28	N # 28
OR-220	N # 632	T # 31	J # 31
Flame-Resistant : FR-300T	C # 87	T # 31	J # 31
Chemical-Resistant : CR	C # 30	T # 31	J # 31

Sunpat-Eco Cold Splice

Applications

This adhesive for vulcanizing rubber is used for splicing and/or repair of conveyor belts at ambient temperature.



Features

- Short curing time. The belt can be in operation only two hours after splicing is completed.
- Wider applicable range
- High Peeling Off Resistance
- Increased operational efficiency
- Shelf life : 9 months

Applicable Range

- Belt Tension : overall max. 1,020 kgf/cm
- Tensile : max. 255 kgf/cm/ply
- Cover Rubber Thickness : 0 - 6.5 mm
- Cover Rubber Type : General Cover Rubber, SAR, UIP, HC-513, OR-210, OR-220, CR, Rough Top



Steel Cord Conveyor Belt

Applications

Long span, high strength, high capacity.


Features

1. High Tensile Strength permit high tension operation
2. Excellent Bending Resistance
3. Extremely Small Elongation
4. Excellent Dynamic Adhesion
5. Excellent Impact Resistance

Product Range

- Belt Width : 800 - 2700 mm
- Belt strength : ST-500 - ST-5000
- Cover rubber : Grade-M, JIS-S, SAR, UIP, XXXX
Low Rolling Resistant (LRR)
FR-300T

Construction

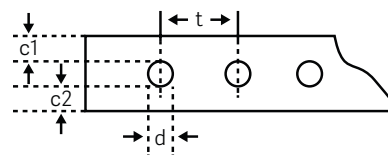

d : cord diameter
t : cord pitch
c1 : top cover rubber
c2 : bottom cover rubber

For further information please contact PT. Bando Indonesia.


Flexowell Conveyor Belt

Produced by Bando Chemical Industries, Ltd. Japan


Features

1. Space saving
Vertical conveyance substantially saves space compared with conventional conveyor facilities
2. Freely design conveyor line angles
Easy to design the required conveyor angle, from flat to steep incline, depending on the facility layout.
3. High capacity conveyance
Significantly improved cross-section area, with dramatically increased load capacity compared with trough conveyors.
4. Reduced facility costs
Small pulley diameters may be used, without the need for skirt boards. Facility costs are reduced with flat rollers.


Space saving

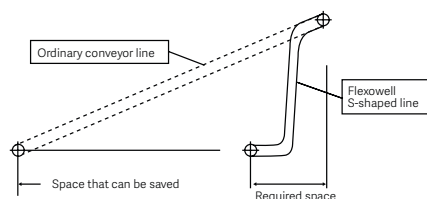

Major line shapes

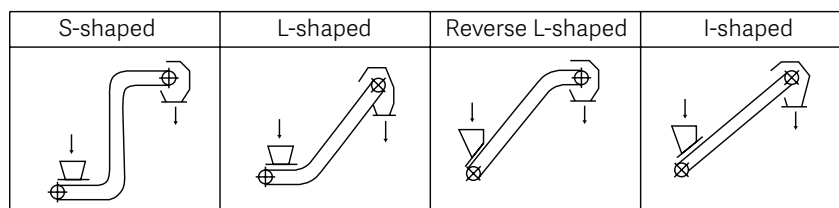

Structure

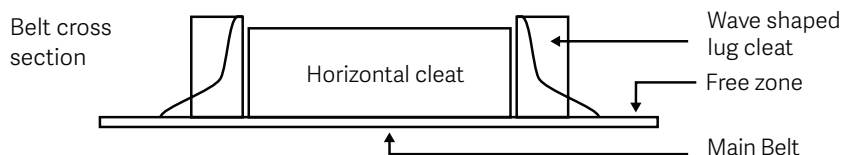

Components

Flexowell Belts are made up of the main body belt, wave-shaped sidewalls and horizontal cleats. The three components are rigidly cold-bonded by mechanical means. Please consult with us, as various combinations are available, depending on the items conveyed, volume and the angle of inclination.

Type 1

Type 2

Type 3



Combination Types (Types 1, 2 and 3 are standard)

Type 1 : No free zone, no horizontal cleats

For lines with 0-16° inclinations, without angle change in conveyance.

Type 2 : No free zone, with horizontal cleats

For sharp inclines, without angle change in conveyance.

Type 3 : With free zone and horizontal cleats

For sharp inclines, with angle change(s) in conveyance.

Type 4 : With free zone, without horizontal cleats

For lines with 0-16° inclinations, with angle change(s) in conveyance.



Minimum Required Pulley Diameter For Multi-Ply Fabric Belt

The figures in this table are applied to :

1. Belts in general use, when their actual tension is 75 to 100% of their tension rating.
2. Heat-Carry belts, when their maximum tension is not more than 70% of their tension rating.

Fabric \ No. of Plies	3	4	5	6	7
EP-100	300	400	550	650	750
EP-150	400	500	650	750	900
EP-200	400	550	700	800	900
EP-250	450	600	750	900	1050
EP-300	500	650	850	1000	1150
EP-350	650	850	1050	1250	1450
EP-400	650	850	1050	1250	1450

Unit in mm

Properties of Fabric

Polyester-Nylon Fabric (EP)

Item		Fabric				
		EP-100	EP-150	EP-200	EP-300	EP-400
Tensile strength (Min.)	kg/cm/ply	100	150	200	300	400
Elongation at Break (Min.)	%	10	10	10	10	10
Approx. Gauge per ply with skim coat	mm	0.9	1.1	1.4	1.8	1.9



Take-Up Stroke

When deciding on the take-up stroke it is necessary to consider both elastic elongation and permanent strength.


(Percentage of Center-to-Center Distance)

Kind of Fabric	Elastic Elongation	Permanent Strength	Take-Up Stroke Recommended
NN100 - 350	0.3 - 0.5	1.0 - 1.2	1.7 + Additional length
NN400 - 630	0.4 - 0.8	1.0 - 1.2	2.0 + Additional length
E P	0.1 - 0.3	0.4 - 0.6	0.9 + Additional length

Additional length = Spare length + Initial stretch
(Initial stretch : Approximate 0.5%)

Spare length equals a half of splicing length or 2 ft (500 mm) whichever is longer, plus 0.2% of the center-to-center distance with a minimum of 6 inches (150 mm) and a maximum of 40 inches (1,000 mm).

The former provides sufficient length in case resplicing is required due to an accident or mishap. The latter is considered necessary to provide the slack in the conveyor line which is required during splicing work and is afterwards absorbed into the take-up.

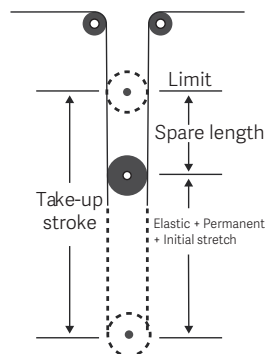

After Sales Services



Consultation



Frequent Technical Visit



Splicing Supervision



Workshop / Training On Site / Off Site



100% Commitment Towards Customer Satisfaction

Data Required To Design Conveyor Belt



PT Bando Indonesia
Conveyor Belt Division

1. Name of Company / Plant Name

2. Name of Belt Line

3. Size of Belt

Width _____ (mm) Length _____ (Mtr) Splice Length _____ (mm)
C-C / Loop = Please Indicate
 Tensile strength _____ (Kg/cm²) Top Cover Thickness _____ (mm) Bottom Cover Thickness _____ (mm)

4. Belt Speed

_____ (Mtr/min) _____ (Mtr/sec) _____ (Ton/hour)

5. Capacity

6. Carrying Material

Name of Material _____ Bulk Density _____ (Ton/m³) Temperature _____ (°C)
 Lump Size: Min _____ (mm) Max _____ (mm)
 Condition of Material: ☐ Dry ☐ Wet ☐ Sticky
(please tick) ☐ Acid ☐ Alkaline ☐ Oily

7. Conveyor

Center Distance _____ (Mtr) Horizontal Distance _____ (Mtr) Vertical Height _____ (Mtr)
 Inclination _____ (°) Length of Inclination Part _____ (Mtr)

8. Type of Drive (please tick)

☐ Single
☐ Tandem drive
☐ Dual or Multi

Location of Drive (please tick)

☐ Tail
☐ Head
☐ Intermediate

Setting Motor (HP, KW) (please tick)

☐ Tail
☐ Head
☐ Intermediate

Surface of Driving Pulley

Bare or Lagged _____
 Dry or Wet _____
 Arc of Contact _____ (°)

9. Type of Take-up (please tick)

☐ Screw ☐ Power winch
☐ Gravity ☐ Other

Location of Take-up (please tick)

☐ After drive ☐ Head intermediate
☐ Tail ☐ Other

Take-up Stroke _____ (cm)

Take-up _____ (Kg)

10. Pulley Diameter

Drive _____ (mm) Head _____ (mm) Tail _____ (mm)
 Take-up _____ (mm) Bend _____ (mm) Snub _____ (mm)

11. Idlers

Trough Angle _____ (°) Carry Idler Pitch _____ (cm)
 Return Idler Pitch _____ (cm) Distance Between Pulley And First Trough Idler _____ (cm)

12. Splicing Method (please tick)

☐ Hot Vulcanized Splice ☐ Cold Splice ☐ Mechanical Splice

13. Condition of Chute

Falling Height _____ (Mtr) Chute Angle _____ (°) Direct height from belt surface _____ (Mtr)

Lighten Impact


Impact Idlers _____ (Mtr) Idlers Supported : by Spring or Cushion Rubber _____ (°) Frame Supported : by Spring or Cushion _____ (Mtr)

Screen Type Bar Pitch _____ (mm) Mesh Size _____ (mm)

14. Tripper (please tick)

☐ Fixed ☐ Moveable

15. Sketch of Conveyor Line (please tick and inform the required information)

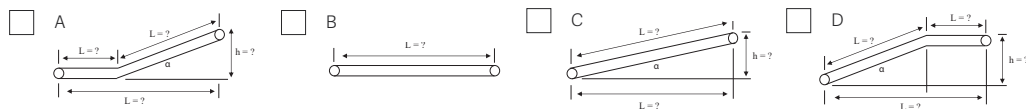



PT Bando Indonesia
Conveyor Belt Division

Data Required To Design Bucket Elevator Belt

1. Name of Company

2. Name of Belt Line

3. Size of Belt

Width _____ (mm)

Length _____ (Mtr)

4. Belt Speed

_____ (mtr/min)

_____ (mtr/sec)

5. Capacity

_____ (Ton/hour)

6. Carrying Material

Name of Material _____ Bulk Density _____ (Ton/m³)

Weight of Material :

Per Bucket _____ (Kg/each)

Total Bucket _____ (Kg)

Condition of Material:
(please tick)

☐

Acid

☐

Alkaline

☐

Oily

☐

Dry

☐

Wet

☐

Sticky

7. Conveyor

Lifting _____ (Mtr)

8. Bucket

Volume _____ (m³/each)

Bucket Fitting Pitch _____ (mm)

Total No. of Bucket _____ (pcs)

Bucket Weight : Per Bucket _____ (kg)

9. Bolt

Diameter of Hole _____ (mm)

Center Distance

Bolt To Bolt _____ (mm)

Total No. of Bolts _____ (pcs)

10. Drive

Setting Motor _____ (KW)

Surface of Driving pulley: Bare or Lagged _____

Dry or Wet _____

11. Pulley Diameter

Drive _____ (mm)

Boot _____ (mm)

Type of Boot Pulley

☐

Bar

☐


Flat

12. Material Loading

☐ Scoop


☐ Discharge

Bucket Dimension

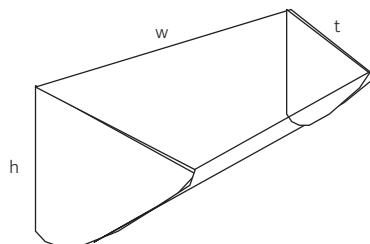

Width	w	m	
Length	l	m	
Height	h	m	
Capacity	vol	m ³ /each	

Belt Holes Construction

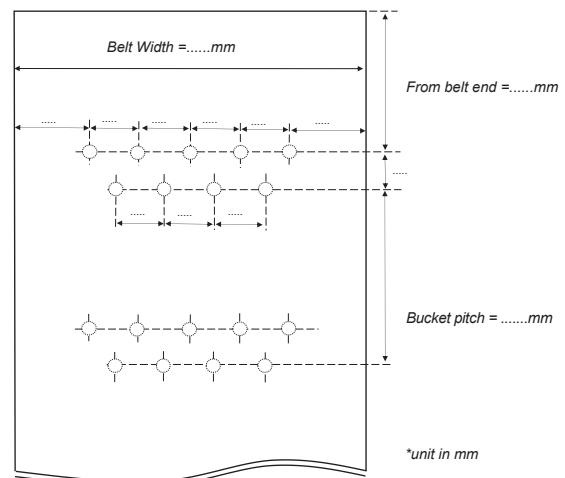



Authorized Agent :

PT RANADITYO SUKSES MAKMUR

Jl. Bakti 4 Kav 52, Cilandak Timur, Pasar Minggu

Jakarta Selatan 12560 - Indonesia

Phone : +6221-7823856, 0855 808 5555

WA Chat : 0855 105 8888

Email : sales@ranadityo.co.id/ranadityo_suksesmakmur@yahoo.com

Website : www.ranadityo.co.id